






Pipe Clamp Thermocouple

Top View

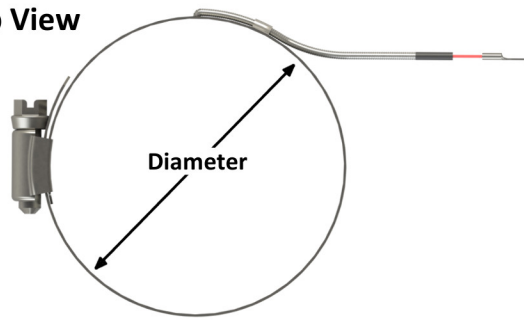

Side View

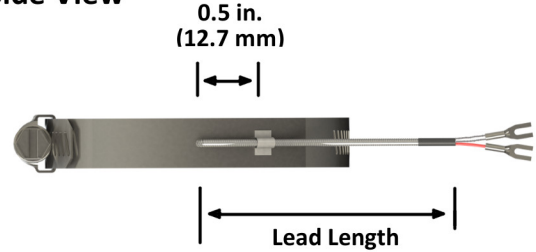

Construction

U = Pipe Clamp

Calibration

J = Type "J"
K = Type "K"
Contact factory for other types

Single/Duplex

0 = Single (2 wire)

Junction Type

G = Grounded, Round Tip
U = Ungrounded, Round Tip

Clamp Diameter Range

Code	Diameter	IPS Size
12	1-1/16 to 1-1/4"	1/2 and 1-3/4"
24	1-1/8 to 2"	1 & 1-1/2"
44	2 to 3-1/4"	2 & 2-1/2"
60	3 to 3-1/4"	3 to 3-1/2"
88	4-3/4 to 6"	4"
96	5-1/4 to 6-1/2"	5"
98	5-3/4 to 7"	6"

Leadwire Type

D = Solid, Fiberglass/Fiberglass w/ SS Overbraid 900° F
G = Stranded, Fiberglass/Fiberglass w/ SS Overbraid 900° F

Special Options

N = None
C = Cable Clamp on Connector
F = BX Connector on Leads
M = Supply with Mating Connector
S = Solid Pins on Plug

Leadwire Terminations

A = 2-1/2" Split Leads
M = 2-1/2" Split Leads w/ #8 Spade Lugs
B = Standard Male Plug 400° F
C = Standard Female Jack 400° F
F = Miniature Male Plug 400° F
G = Miniature Female Jack 400° F

Leadwire Length ("B")

Whole Inches: Examples: 048 = 48 inches

Note: These assemblies are generally constructed with 20 gauge wire.

Pipe Clamps are made of stainless steel.

Contact us for ungrounded style thermocouples.