




# Melt Bolt Fiberglass Thermocouple

Style M, N, & O

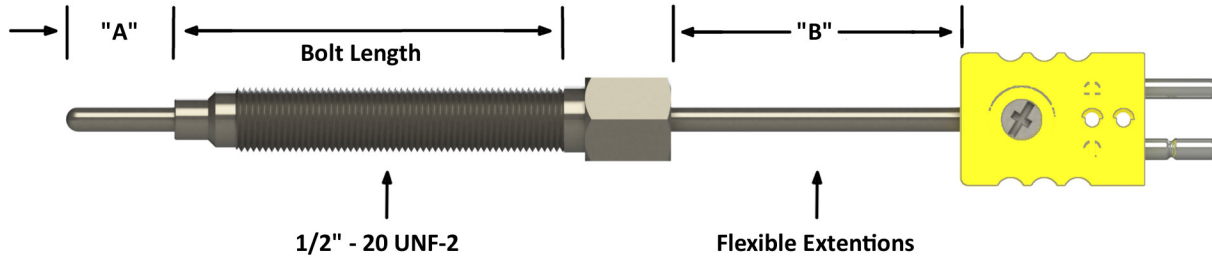

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	
MT															

**Construction**

M = 3" Melt Bolt  
N = 4" Melt Bolt  
O = 6" Melt Bolt

**Calibration**

J = Type "J"  
K = Type "K"  
Contact factory for other types

**Single/Duplex**

0 = Single (2 wire)  
4 = Duplex (4 wire)

**Junction Type**

G = Grounded, Round Tip  
U = Ungrounded, Round Tip

**Sheath Diameter (inch)**

B = 1/8 (.125)  
C = 3/16 (.188)

**Tip Length ("A")**

F = 3/8"

**Tip Length ("A" Fractional)**

N = None    H = 1/8  
B = 1/8      M = 3/4  
D = 1/4

**Special Options**

N = None  
C = Cable Clamp on Connector  
F = BX Connector on Leads  
M = Supply with Mating Connector  
S = Solid Pins on Plug

**Leadwire Terminations**

A = 2-1/2" Split Leads  
M = 2-1/2" Split Leads with Spade Lugs  
T = 2-1/2" Split Leads with #8 Spade Lugs & BX Connectors  
B = Standard Male Plug 400° F  
C = Standard Female Jack 400° F  
F = Miniature Male Plug 400° F  
G = Miniature Female Jack 400° F

**Leadwire Length ("B")**

Whole Inches: Examples: 048 = 48 inches

**Leadwire/Extension Type**

D = Solid, Fiberglass/Fiberglass w/ SS Overbraid 900° F  
H = Solid, Fiberglass/Fiberglass w/ SS Flex Armor 900° F  
G = Stranded, Fiberglass/Fiberglass w/ SS Overbraid  
H = Stranded, Fiberglass/Fiberglass w/ SS Flex Armor 900° F

Note: For leads beyond flex Armor ("C" length), include length after "B" length. Example 048 (012)