



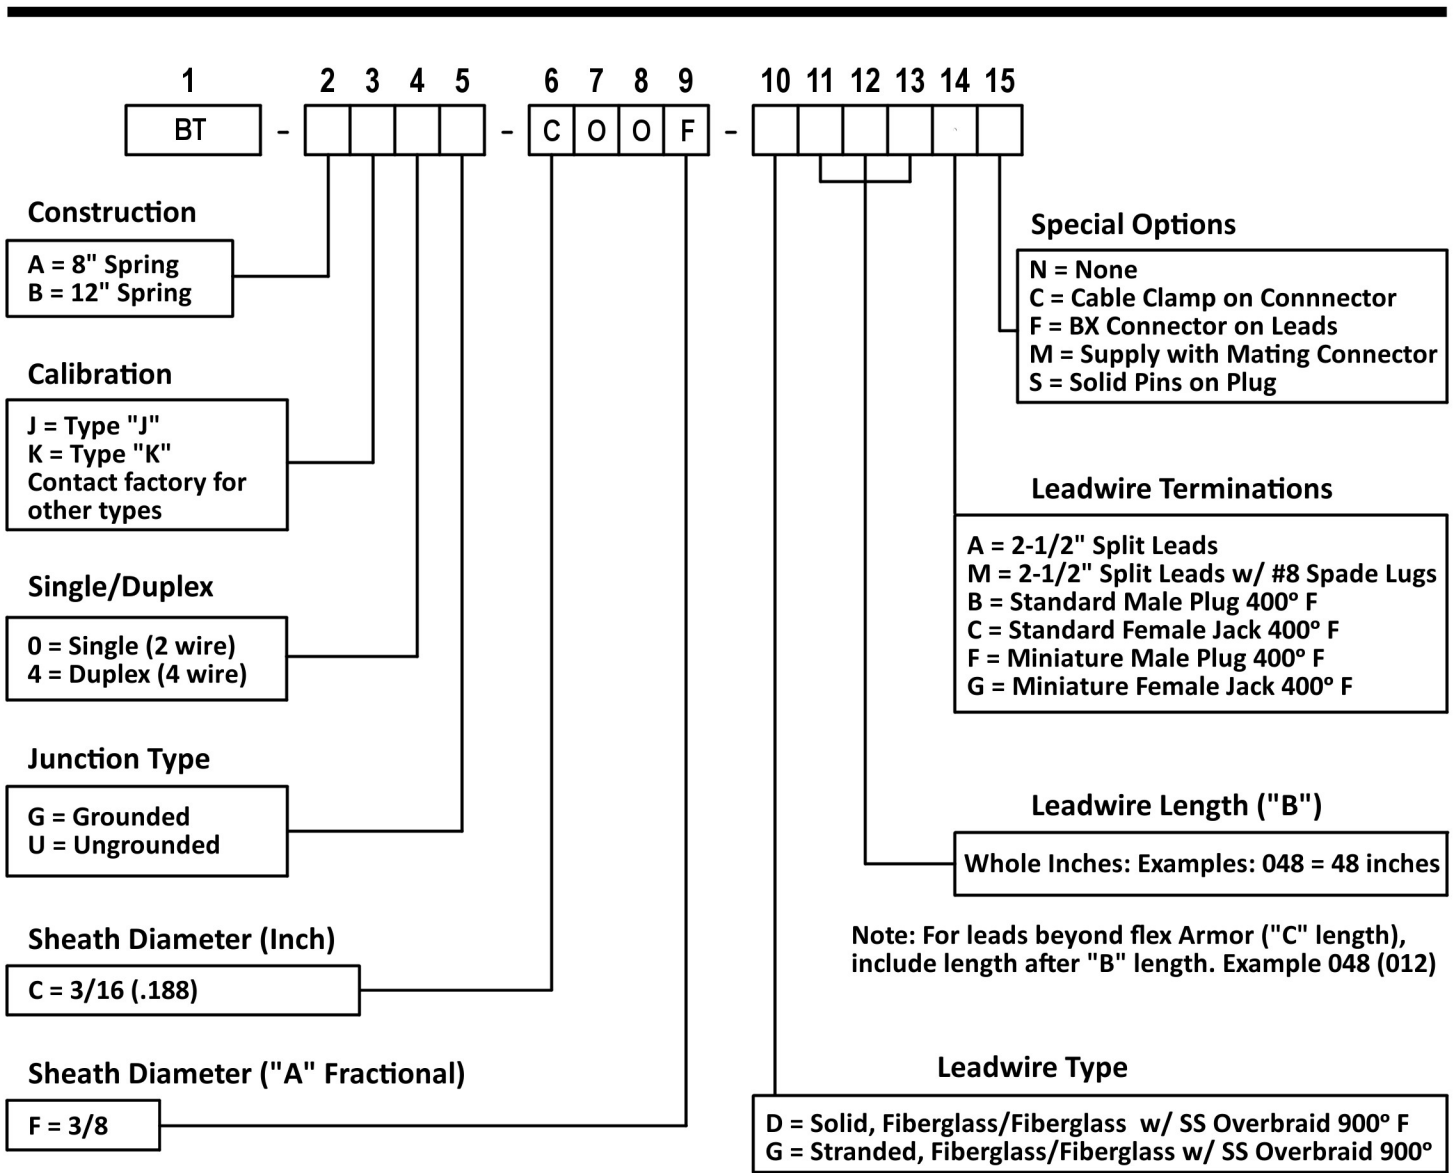

Spring Adjustable Depth Thermocouple

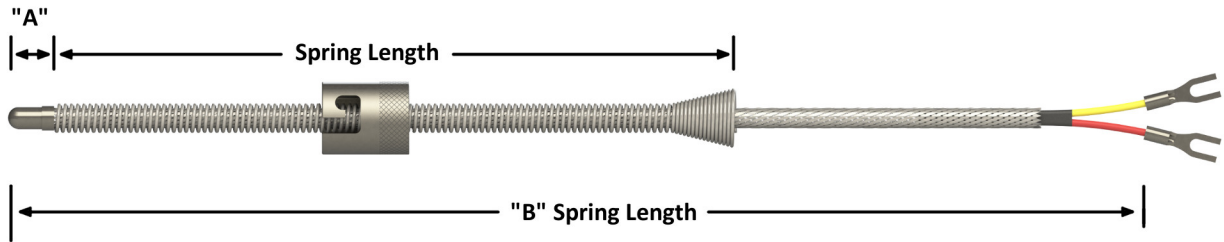

Note: For leads beyond flex Armor ("C" length), include length after "B" length. Example 048 (012)

Note: Duplex and 1/8" OD sensors are usually constructed with 20 gauge wire. All others are generally constructed with 20 gauge wire